

# HAP IP40 2,1W

Segnapassi / Guide lights





KELVIN	CRI	LUMEN EFFETTIVI / REAL OUTPUT	CLASSE ENERGETICA / ENERGY CLASS
2700	90	~ 90	G
3000	90	~ 90	G
4000	80	~ 115	G

2006/95/CE -- 2002/95/CE -- 1907/2006/CE -- 2010/30/UE -- EN 60598-1 -- EN 60598-2-1  
EN 60598-2-2 -- EN 62471 -- EN 62031



## Hap IP40 2,1W

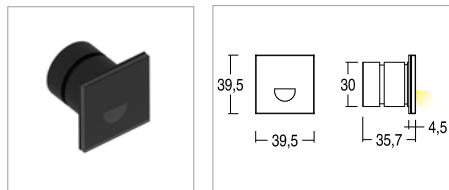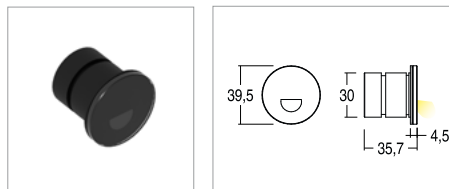

### INCLUDED



Codice/Cod: **3434**

FORMA SHAPE	FINITURA FINISH	COLORE COLOUR	OTTICHE OPTICALS
Tondo / Round <b>10</b>	Black ■ SILK SCREENED <b>6</b>	4000 K <b>2</b>	Asymmetric <b>2</b>
Quadrato / Square <b>20</b>		3000 K <b>3</b>	
		2700 K <b>W</b>	
		Red <b>4</b>	
		Green <b>5</b>	
		Blu <b>6</b>	

### ACCESSORI / ACCESSORIES

<b>30500012</b>	Controcassa / Outer casing
<b>330010000</b>	(Vin 220/240Vac) 700mA - 7.7W - IP20
<b>330009700</b>	(Vin 220/240Vac) 700mA - 10W - IP20
<b>330009500</b>	(Vin 220/240Vac) 700mA - 14W - IP67
<b>330009900</b>	(Vin 220/240Vac) 700mA - 30W (min 14W) - IP67
<b>330007800</b>	(Vin 220/240Vac) 700mA - 20W (min 7W)
<b>330007200</b>	(Vin 220/240Vac) 700mA - 28W (min 2W) - Dimmer Push, 0-10, 1-10, DALI
<b>307500010</b>	Cavo neoprene 2x0,5 / Neoprene cable 2x0.5
<b>307500020</b>	Connettore IP68 / IP68 connector

## Descrizione / description

Faretti segnapasso a parete da incasso per interni IP40 da 2.1W. Installazione con molle su contropareti in cartongesso o con controcassa su muratura. Disponibile con flangia tonda e quadrata. Flangia in vetro serigrafato nero, corpo in alluminio anodizzato nero. Disponibili nelle temperature colore 2700K - CRI90 / 3000K - CRI 90 / 4000K CRI80, MacAdam Step 3. Ottica asimmetrica. Fornito con 150mm di cavo 2x0.35mm<sup>2</sup>. Durata L80 B20 a 100.000h Ta (temperatura ambiente) 25°. Alimentatore da ordinare separatamente.

IP40 2.1W recessed wall mounted steplights for indoor use. Installation with springs on plasterboard false wall or with housing box for masonry. Available with round and square shape. Black silk screened glass flange and black anodized aluminium body. Colour temperatures 2700K - CRI90 / 3000K - CRI 90 / 4000K - CRI80, MacAdam Step 3. Asymmetric optics. Supplied with 150mm of cable 2x0.35mm<sup>2</sup>. Lifespan L80 B20 at 100,000h Ta (ambient temperature) 25°. Driver to be ordered separately